



Lumistrips

DATASHEET

LUMIFLEXRGB-1080 ECO LED STRIP RGB 1000LM 24V 60
LEDS/M 5M REEL

SKU: 37926




LUMIFLEX-RGB-1080 ECO LED STRIP RGB 1000LM 24V 60 LEDS/M 5M REEL


Article number (SKU)		37926	
Product name	LUMIFLEX-RGB-1080 ECO LED STRIP RGB 1000LM 24V 60 LEDS/M 5M REEL		
Model identifier (equivalent models)	LumiFlex300 Eco RGB		
Photometric data (at TJ = 65°C, ± 10%)			
Light color	RED	GREEN	BLUE
Binning	-	-	-
Color temperature (K)			
Dominant wavelength (nm)	610 - 630 nm	535 - 545 nm	460 - 480 nm
Luminous flux (lm)	250 lm	600 lm	150 lm
Radiant power (mW)	-		
CRI (Ra)	-		
Efficiency (lm/W)			
Beam angle FWHP	120°		
Lifetime L80B10C1 (h)	>10000 h		
Photometric code	-		
Electrical data (at TJ = 65°C, ± 10%) (reference settings)			
Operating mode	Constant voltage		
Voltage (V)	24 V		
Current (mA)	-		
Power (W)	20 W per color, 60 W for white		
Standby power consumption (W)	0 W		
Dimmable	Yes		
Dimensions / Mechanical data		Metric units	Imperial units
Length	5000 mm	196.50"	
Width	10 mm	0.393"	
Height	1.9 mm	0.075"	
Number of LEDs (pcs)	300 pcs		
Weight (g)	70 g		
Heat dissipation	Yes		
Temperatures			
Operating temperature at Tc	-40 °C to +65 °C		
Ambient temperature	-40 °C to +50 °C		
Storage temperature	-40 °C to +100 °C		
Approvals / Certifications			
CE / RoHS / Reach	Yes		
EN 62471 Risk group	RG0		
Energy efficiency class	-		
Mains voltage luminous efficacy (lm/W)	-		
Version			
Date	1. Feb 2023		

CONNECTION OF LED STRIP

The Professional LED Strips are connected via a lead connection to the connection pads provided for this purpose.

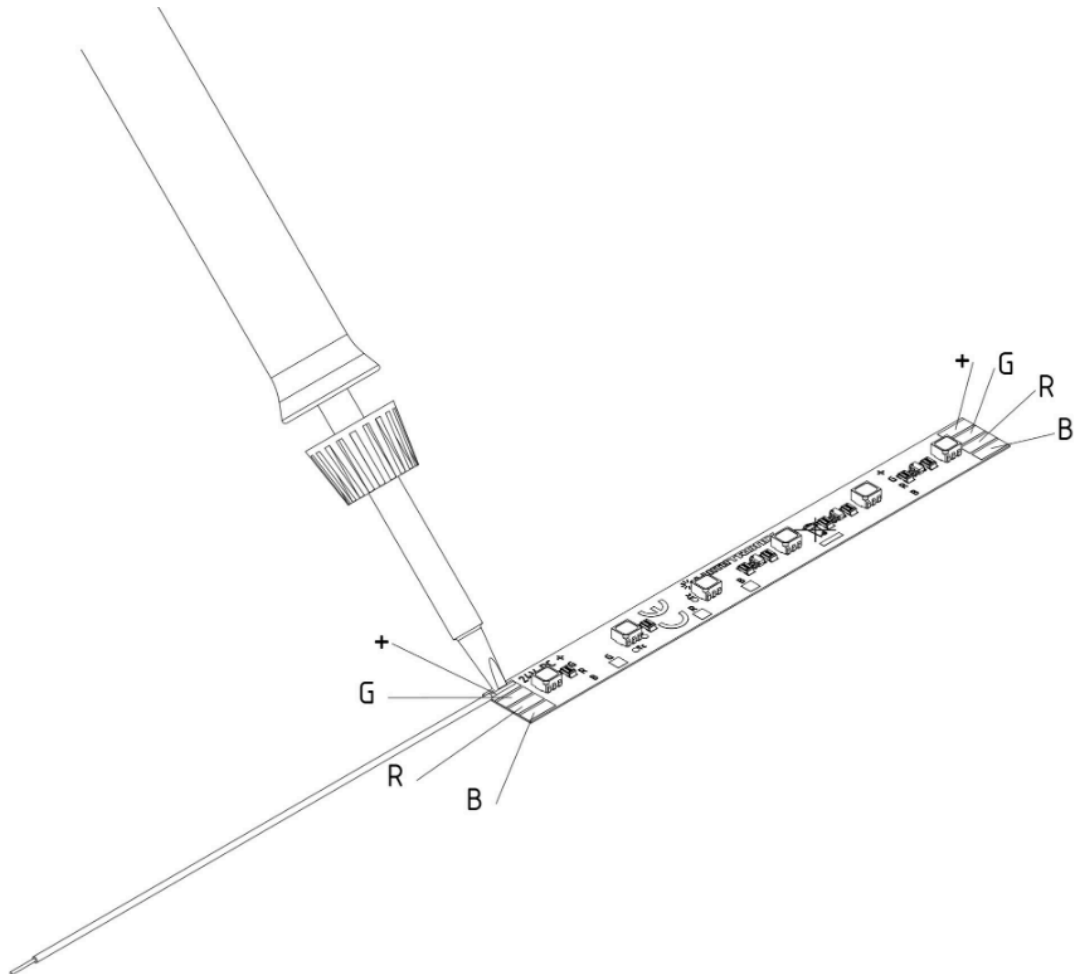


CUTTING INFO

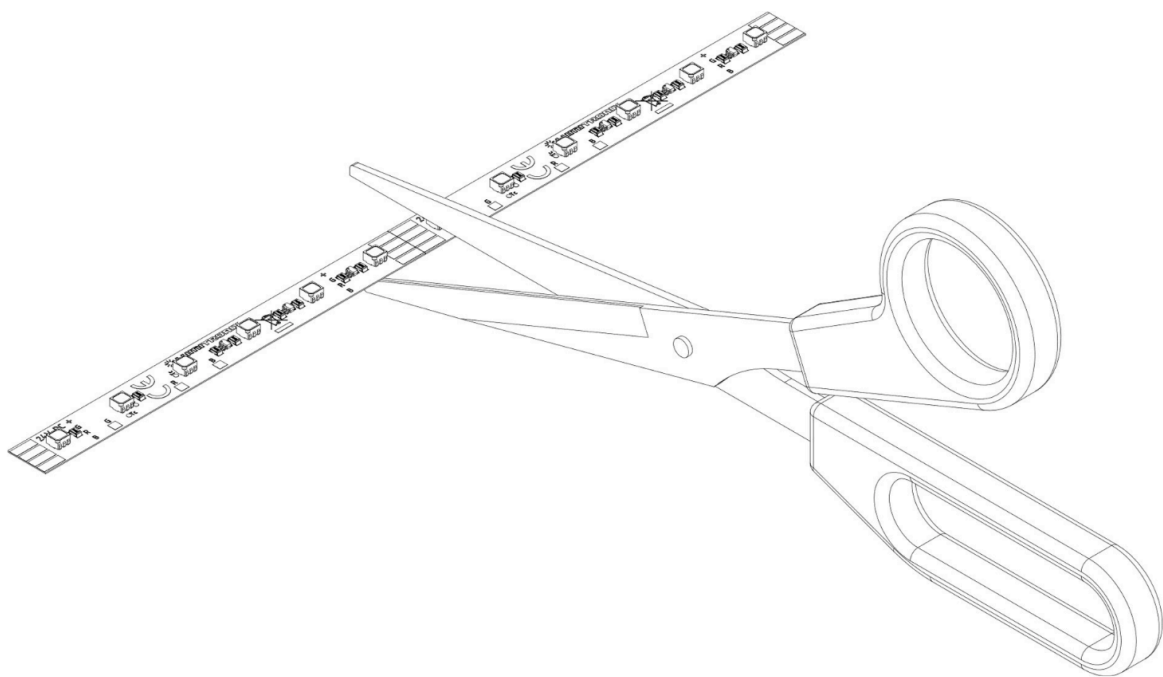

The LED strip can be separated or shortened every 100 mm. On the back of the LED strip is a double-sided heat-conducting adhesive tape, which allows installation of the LED strip. Professional LED strips can be cut with scissors.

LED STRIP PRODUCT NAME EXPLAINED

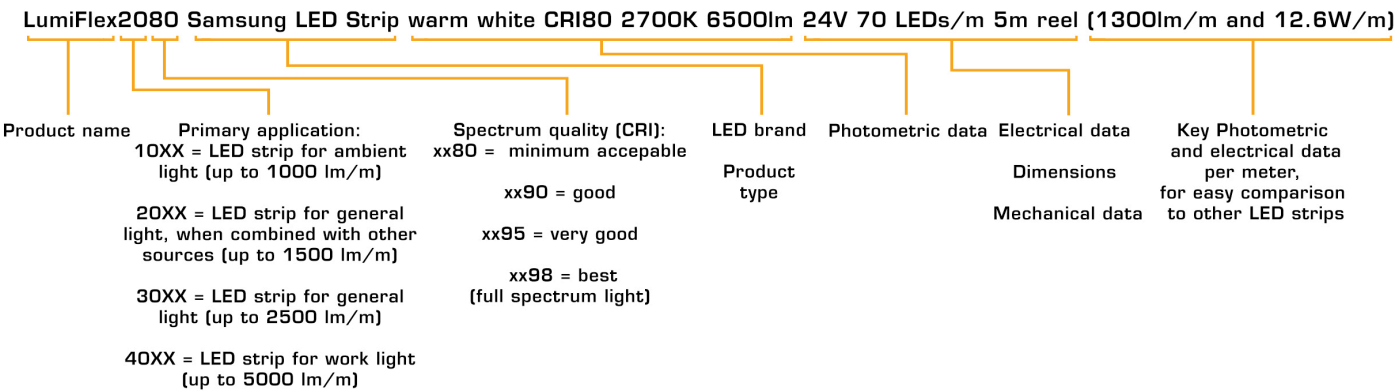

LUMIFLEX-RGB-1080 ECO LED STRIP RGB 1000LM 24V 60 LEDS/M 5M REEL

Due to the special conditions in the production process of LEDs, the specified values are statistical averages. The individual LED may deviate from them.

The LED modules and all their components must not be mechanically stressed.

Avoid undue claw action, e.g. by screwing or excessive bending.

The LED modules must not come into contact with aggressive chemical substances, either in operation or in storage.

The installation of the module (with the operating device) must be carried out in compliance with all applicable electrical and safety standards.

Pay attention to standard ESD precautions when installing the modules.

- The components on the LED modules must not be subjected to mechanical stress.
- The conductive paths on the boards must not be damaged or interrupted by the installation.
- Store and operate the LED modules only at a final humidity of 10% to 60%.

Our LED modules are not protected against overload, overtemperature and short-circuit currents. To operate the modules safely and reliably, it is therefore necessary to use an electronically stabilized power supply unit in which these

in which these safety functions are already integrated. If other power supplies than the ones distributed by us are used, the following protective

the following protective measures must be ensured on the power supply side:

MINIMUM REQUIREMENTS FOR POWER SUPPLIES: Short circuit protection - Overload protection - Overtemperature protection - The installation of LED modules may only be carried out in compliance with all applicable regulations and standards by an authorized electrician.

Distribution and reproduction of this document, utilization and communication of its contents are prohibited unless expressly permitted. Any infringement will result in compensation for damages. All rights reserved in the event of patent, utility model or design registration. We reserve the right to make technical changes.

This LED strip can be purchased via the following websites:

www.ledrise.eu / www.lumistrips.com

